



25x25x10mm (0.98x0.98x0.39in) - 5 blade


Bearing System— 2 Ball Bearing,
 Life Expectancy--- 100000hrs @ 10000RPM @ 30°C
 Frame----- Thermoplastic PBT+30% GF, UL94-V0
 Impeller----- Thermoplastic PBT+15% GF, UL94-V0
 Lead Wire----- UL 1061, AWG 30, 240±10mm, Red(+), Black(-)
 Protection----- Locked rotor protection
 IP Grade ----- IP51, IP54

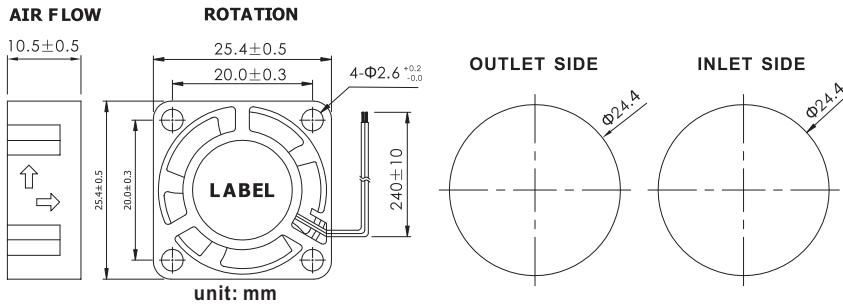

Dim: 494x423x155 mm
 N.W.: 8.2 kgs
 G.W.: 10.7 kgs
 Q'TY: 1080 pcs

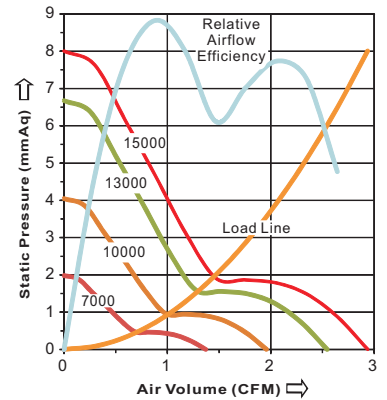

FUNCTIONS	PART NUMBER	RATED (VDC)	LABEL CURRENT	ACTUAL CURRENT	POWER (WATTS)	SPEED (RPM)	AIRFLOW (CFM)(m³/min)	PRESSURE (mmAq)(In H²O)	NOISE (dBA)	WEIGHT (Q'TY/CTN)
1b:AS 2a:FG	D2510H05BPLBxy-5	05 (04~06)	0.260	0.220	1.10	13000	2.60 0.07	6.67 0.26	30.54	7.6g (1080pcs)
	D2510M05BPLBxy-5		0.190	0.190	0.95	10000	2.02 0.06	4.05 0.16	24.21	
	D2510L05BPLBxy-5		0.140	0.140	0.70	7000	1.39 0.04	1.98 0.08	18.14	
	D2510X12BPLBxy-5	12 (07~14)	0.136	0.130	1.56	15000	2.92 0.08	8.00 0.32	34.19	7.6g (1080pcs)
	D2510H12BPLBxy-5		0.090	0.090	1.08	13000	2.60 0.07	6.67 0.26	30.54	
	D2510M12BPLBxy-5		0.070	0.070	0.84	10000	2.02 0.06	4.05 0.16	24.21	
D2510L12BPLBxy-5	0.060		0.060	0.72	7000	1.39 0.04	1.98 0.08	18.14		

Remark:

- Part no. suffix: "xy"=Function detail or "x"=Function number. and "y"=customer ID
- D series - High Performance series:
 Uses single coil differential type drive with higher efficiency and more functions (depending on the specific model).